




BANSHEE

LOW POWER VARIABLE OPTIC

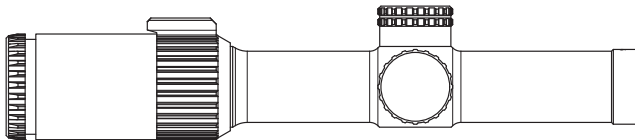

MONSTRUM[®]

1-6x24

1-8x24


1-10x24

Banshee LPVO Rifle Scope Features:

- Adjustable magnification for near and far targeting.
- MOA reticle with hash marks for targeting long distances.
- 5 Levels of Red and Green illumination for better reticle visibility.
- 1/2 MOA/click windage and elevation adjustment.
- Aircraft grade 6061 hard-anodized aluminum construction
- A sealed, nitrogen charged scope tube for resistance to fog and water.


For accessories for your product, visit us online:

MonstrumTactical.com

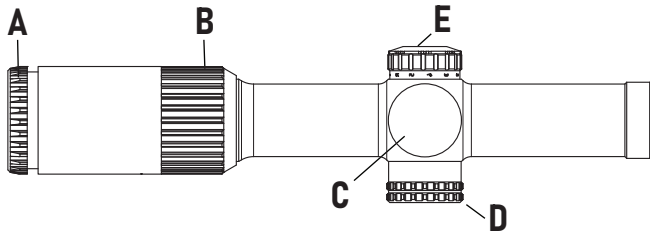

- A** - Focus Ring (Diopeter settings)
- B** - Magnification Control
- C** - Elevation Adjustment
- D** - Windage Adjustment
- E** - Illumination Control (Battery door)

Mounting the Scope



Eye Relief: 4in

1. Determine the proper eye relief distance.

Set the magnification to the highest setting and look through the scope. The optimum eye relief is the farthest distance away from the scope from which you can still see the entire circular field of view. The eye relief should be approximately 4 inches.

2. Position your Scope.

This scope requires 30mm scope rings (not-included). Hold your rifle in a comfortable shooting position with your cheek welded to the stock. Position the scope according your optimum eye relief distance.

3. Secure the scope.

Rotate the scope within the rings such that the vertical crosshair is aligned vertically with the rifle. Tighten the rings securely and evenly. If necessary, apply a drop of loc-tite® to the threads of the screws to secure them.

Focusing the Scope

The first step in focusing your scope, is adjusting the focus ring at the near end of the eyepiece. **Please note** that adjusting the focus ring does not bring the target image into focus, but only focuses your eye on the reticle.

To adjust the focus ring, point the scope towards a blank wall or the sky, look through the scope and adjust the focus ring until the reticle is in sharp focus.

Sighting in your Scope


Tip: Before firing any rounds, we recommend bore sighting your rifle.

1. Place your target 100 yards away (or the distance you wish to sight your scope at).
2. Position your rifle on a steady shooting platform, pointed at the target.
3. For scopes with variable magnification, set to the maximum setting.
4. Fire a round at the center of the target, taking care not to move the rifle.
5. Using a spotting scope/binoculars, identify the bullet hole on the target.

Sighting in your Scope

6. Using the windage and elevation adjustment dials on your scope, adjust the position of the crosshairs to align with the bullet hole. The elevation dial is located on the top. The windage dial is located on the right side. Each click of the adjustment dial will move the position of the crosshairs by $\frac{1}{2}$ **MOA** or roughly $\frac{1}{2}$ **inch at 100 yards**.
7. Once the crosshairs are aligned with the bullet hole, aim again at the center of the target and repeat the process until you are consistently hitting the center of the target.

Adjusting the Windage/Elevation




Remove the turret cap and adjust as needed.

Unscrew the center hex bolt to reset zero if needed.

Screw turret cap back on to protect your scope.

MX1 MOA Reticle

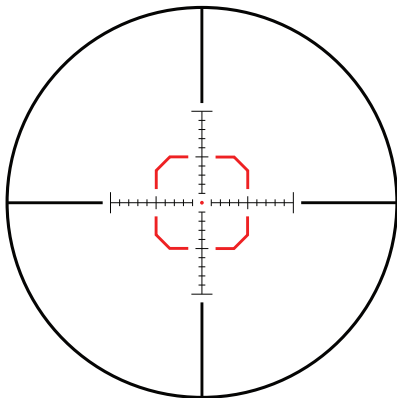

MX1

MX1 MOA Reticle

This scope is equipped with a BDC reticle designed with set hashmarks for estimating distance and for bullet drop compensation.

The reticle will illuminate in 5 levels of red or green.

Warranty Support

LIFETIME WARRANTY

Monstrum guarantees this product against manufacturing defects in materials and workmanship for the Life of your ownership. For more warranty information please visit: MonstrumTactical.com/warranty

MonstrumTactical.com

All information and images are (c) 2022 Monstrum Tactical Inc