


MONSTRUM
TACTICAL

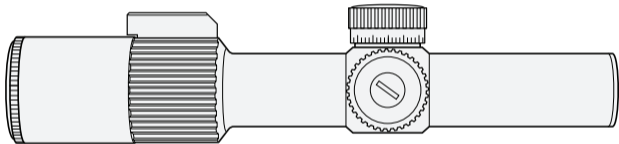

1-6x24

FIRST FOCAL PLANE RIFLE SCOPE

SKU: GA1624

Monstrum Tactical GA1624 Features:

- Adjustable 1-6x magnification for targeting out to 400 yards and beyond.
- Our specially designed Type-C first focal plane reticle for faster acquisition.
- 1/2 MOA/click windage and adjustment knobs with resettable zeroes.
- Aircraft grade 6061 hard-anodized aluminum construction
- A sealed, nitrogen charged scope tube for resistance to fog and water.

For accessories for your product, visit us online:

MonstrumTactical.com/G-Alpha

MonstrumTactical.com

All information and images are (c) 2019 Monstrum Tactical Inc




A - Focus Ring (Diopeter settings)

B - Magnification Control

C - Elevation Adjustment

D - Windage Adjustment

Mounting the Scope



Eye Relief: 4in

1. Determine the proper eye relief distance.

Set the magnification to the highest setting and look through the scope. The optimum eye relief is the farthest distance away from the scope from which you can still see the entire circular field of view. For the GA1624, the eye relief should be approximately 4 inches.

2. Position your Scope.

The GA1624 requires 30mm scope rings (not-included). Hold your rifle in a comfortable shooting position with your cheek welded to the stock. Position the scope according your optimum eye relief distance.

3. Secure the scope.

Rotate the scope within the rings such that the vertical crosshair is aligned vertically with the rifle. Tighten the rings securely and evenly. If necessary, apply a drop of loc-tite[®] to the threads of the screws to secure them.

Focusing the Scope

The first step in focusing your scope, is adjusting the focus ring at the near end of the eyepiece. **Please note** that adjusting the focus ring does not bring the target image into focus, but only focuses your eye on the reticle.

To adjust the focus ring point the scope toward a blank wall or the sky. Look through the scope and adjust the focus ring until the reticle is in sharp focus.

Sighting in your Scope

Tip: Before firing any rounds, we recommend bore sighting your rifle.

1. Place your target 100 yards away (or the distance you wish to sight your scope at).
2. Position your rifle on a steady shooting platform, pointed at the target.
3. For scopes with variable magnification, set to the maximum setting.
4. Fire a round at the center of the target, taking care not to move the rifle.
5. Using a spotting scope/binoculars, identify the bullet hole on the target.
6. Using the windage and elevation adjustment dials on your scope, adjust the position of the crosshairs to align with the bullet hole. The elevation dial is located on the top. The windage dial is located on the right side. Each click of the adjustment dial will move the position of the crosshairs by $\frac{1}{2}$ **MOA** or roughly $\frac{1}{2}$ **inch at 100 yards**.

Sighting in your Scope

7. Once the crosshairs are aligned with the bullet hole, aim again at the center of the target and repeat the process until you are consistently hitting the center of the target.

The windage and elevation dials have numbered markings at the base and can be reset to zero for a simpler point of reference. To reset the turrets to zero, simply unscrew the set screw at the top of the turret using a coin, rotate the turret to align the “0” with the reference point at the base of the turret, then re-tighten the set screw.

Adjusting the Windage/Elevation




Twist the top dial to adjust the Elevation (80 MOA)




Twist the side dial to adjust the Windage (80 MOA)

(Your turrets may look different. Image is for demonstration purposes.)

First Focal Plane Reticle



1x



6x

Numbers above the center are an approximate range of yardage for a 18in target.
Numbers below the center are an approximate BDC for a 55 grain 5.56 round.

First Focal Plane Reticle

The GA1624 Scope is equipped with a Type-C reticle designed with set marks for estimating distance and for holdover correction.

1 MOA (Minute of Angle) = approx. 1 inch @ 100 yards away.

This scope uses a first focal plane reticle, meaning the size of the reticle relative to the target image stays consistent across different magnification settings. The ranging information also remains constant allowing for faster, more convenient range estimation and holdover correction.

LIFETIME WARRANTY

Monstrum guarantees this product against manufacturing defects in materials and workmanship for the Life of your ownership. For more warranty information please visit: [**MonstrumTactical.com/warranty**](https://MonstrumTactical.com/warranty)