

# MONSTRUM®



**3x32**

**RAVEN PRISM SCOPE**

SKU: P332R

## **Monstrum Tactical P332R Features:**

---

- Fixed 3 times magnification with a 30mm objective lens, for targeting out to 200 yards.
- Glass prism optical system, rather than a refracting lens system like traditional scopes, for better optical quality in a smaller package.
- Black glass-etched reticle visible with or without battery powered illumination.
- Adjustable reticle illumination with 5 brightness levels in red or green.
- ½ MOA/click windage and elevation adjustments.
- Aircraft grade 6061 aluminum construction, for lightweight and durable performance.
- Sealed nitrogen charged scope tube for resistance to fog and water.


## **Your scope package includes:**

---

- Lens covers.
- Lint-free cleaning cloth for the lens.
- CR2032 3V battery.

For more accessories for your product, visit us online:


**[MonstrumTactical.com](http://MonstrumTactical.com)**

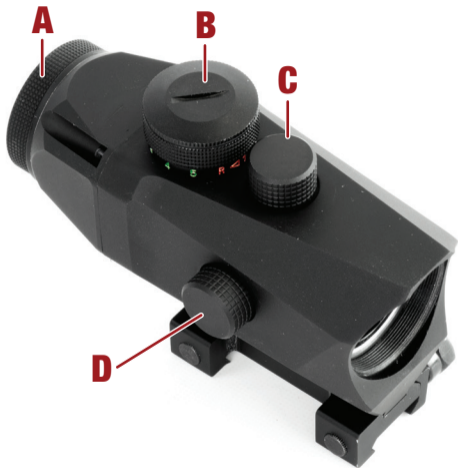

- A** - Focus Ring (Diopeter settings)
- B** - Reticle Illumination Control (Battery Door)
- C** - Elevation Adjustment
- D** - Windage Adjustment

## Mounting the Scope

---



***Eye Relief: 3.5in***

### **1. Determine the proper eye relief distance.**

The optimum eye relief is the farthest distance away from the scope from which you can still see the entire circular field of view. For the P332R, the eye relief should be approximately 3.5 inches.

### **2. Position your Scope.**

Hold your rifle in a comfortable shooting position with your cheek welded to the stock. The scope should be mounted at a comfortable eye relief in relation to this position. Set your scope mount and position the scope accordingly.

### **3. Secure the scope.**

Tighten the rings securely and evenly. If necessary, apply a drop of loc-tite® to the threads of the screws to secure them.

## Focusing the Scope

---

The first step in focusing your scope, is adjusting the focus ring at the near end of the eyepiece. **Please note** that adjusting the focus ring does not bring the target image into focus, but only focuses your eye on the reticle.

To adjust the focus ring:

1. With the scope pointed toward a blank wall or the sky, look through the scope.
2. Adjust the focus ring until the reticle is in sharp focus.

## Sighting in your Scope

---

*Tip: Before firing any rounds, we recommend bore sighting your rifle.*

1. Place your target 100 yards away (or the distance you wish to sight your scope at).
2. Position your rifle on a steady shooting platform, pointed at the target.
3. For scopes with variable magnification, set to the maximum setting.
4. Fire a round at the center of the target, taking care not to move the rifle.
5. Using a spotting scope/binoculars, identify the bullet hole on the target.
6. Using the windage and elevation adjustment dials on your scope, adjust the position of the crosshairs to align with the bullet hole. The elevation dial is located on the top. The windage dial is located on the right side. Each click of the adjustment dial will move the position of the crosshairs by  $\frac{1}{2}$  **MOA** or roughly  $\frac{1}{2}$  **inch at 100 yards**.





## Sighting in your Scope

---

7. Once the crosshairs are aligned with the bullet hole, aim again at the center of the target and repeat the process until you are consistently hitting the center of the target.

## P332R Reticle

---



## P332R Reticle

---

The P332R Scope is equipped with a Circle Dot reticle designed with set hashmarks for estimating distance and for holdover correction.

*1 MOA (Minute of Angle) = approx. 1 inch @ 100 yards away.*

The scope uses a first focal plane reticle, meaning the size of the reticle relative to the target image stays consistent across different magnification settings. The ranging information also remains constant allowing for faster, more convenient range estimation and holdover correction.

The reticle is equipped with an illumination feature that lights up red in variable brightness. The illuminated reticle aids visibility in low light environments such as during dusk or against dark targets. It is not usable in very dark environments.

## **Warranty Support**

Monstrum guarantees this product against manufacturing defects in materials and workmanship for 1 year. For more warranty information please visit: **[MonstrumTactical.com/warranty](https://MonstrumTactical.com/warranty)**

**MonstrumTactical.com**

All information and images are (c) 2020 Monstrum Tactical Inc