

MONSTRUM



3-9x32

TACTICAL RIFLE SCOPE

SKU: S3932-R-RG

Monstrum Tactical S3932-R-RG Features:


- Adjustable 3-9x magnification for targeting out to 300 yards and beyond.
- Rangefinder reticle for fast range estimation and holdover correction.
- Etched reticle that is visible with or without illumination.
- Adjustable illuminated reticle controls, allowing for better reticle visibility at night or in low light environments.
- 1/4 MOA/click windage and adjustment knobs with resettable zeroes and turret locks to prevent slippage.
- Aircraft grade 6061 hard-anodized aluminum construction
- A sealed, nitrogen charged scope tube for resistance to fog and water.

Your scope package includes:

- Pair of low profile 1 in picatinny scope rings.
- Detachable Throw Lever.
- Lens cover.
- Lint-free cleaning cloth for the lens.
- CR1632A 3V battery.


For more accessories for your product, visit us online:

MonstrumTactical.com

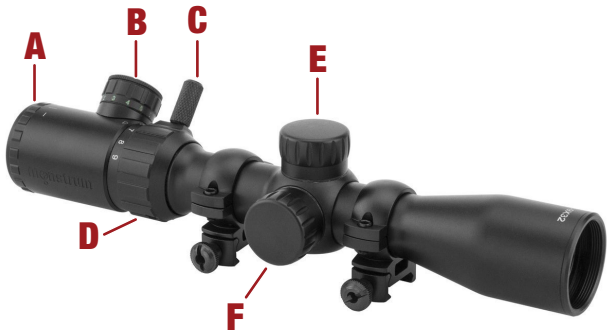

- A** - Focus Ring (Diopeter settings)
- B** - Reticle Illumination Control (Battery Door)
- C** - Throw Lever
- D** - Magnification Control
- E** - Elevation Adjustment
- F** - Windage Adjustment

Mounting the Scope



Eye Relief: 3in

1. Determine the proper eye relief distance.

Set the magnification to the highest setting and look through the scope. The optimum eye relief is the farthest distance away from the scope from which you can still see the entire circular field of view. For the S3932-R-RG, the eye relief should be approximately 3 inches.

2. Position your Scope.

The S3932-R-RG requires 30mm scope rings (included). Hold your rifle in a comfortable shooting position with your cheek welded to the stock. Position the scope according your optimum eye relief distance.

3. Secure the scope.

Rotate the scope within the rings such that the vertical crosshair is aligned vertically with the rifle. Tighten the rings securely and evenly. If necessary, apply a drop of loc-tite[®] to the threads of the screws to secure them.

Mounting the Scope

The S3932-R-RG has a 1 inch diameter tube and requires a mount with 1 inch diameter scope rings. The scope requires a scope mount with a minimum of 0.5 inches of clearance from the surface of the rail.

The cylindrical scope tube segments are 1.15 inches in length and spaced 1.2 inches apart. Please ensure that your mounting system allows for proper spacing of the scope rings.

Focusing the Scope

The first step in focusing your scope, is adjusting the focus ring at the near end of the eyepiece. **Please note** that adjusting the focus ring does not bring the target image into focus, but only focuses your eye on the reticle.

With the scope pointed toward a blank wall or toward the sky, look through the scope. Adjust the focus ring until the reticle is in sharp focus.

Sighting in your Scope

Tip: Before firing any rounds, we recommend bore sighting your rifle.




1. Place your target 100 yards away (or the distance you wish to sight your scope at).
2. Position your rifle on a steady shooting platform, pointed at the target.
3. For scopes with variable magnification, set to the maximum setting.
4. Fire a round at the center of the target, taking care not to move the rifle.
5. Using a spotting scope/binoculars, identify the bullet hole on the target.
6. Using the windage and elevation adjustment dials on your scope, adjust the position of the crosshairs to align with the bullet hole. The elevation dial is located on the top. The windage dial is located on the right side. Each click of the adjustment dial will move the position of the crosshairs by **¼ MOA** or roughly **¼ inch at 100 yards**.

Sighting in your Scope

7. Once the crosshairs are aligned with the bullet hole, aim again at the center of the target and repeat the process until you are consistently hitting the center of the target.
8. Once the scope has been zeroed, you can lock down the turrets to prevent the dials from moving during shooting.

The windage and elevation dials have numbered markings at the base and can be reset to zero for a simpler point of reference. To reset the turrets to zero, simply unscrew the set screw on the top of the turret. Rotate the turret to align the “0” with the reference point at the base of the turret, then re-tighten the set screw.

Rangefinder Reticle

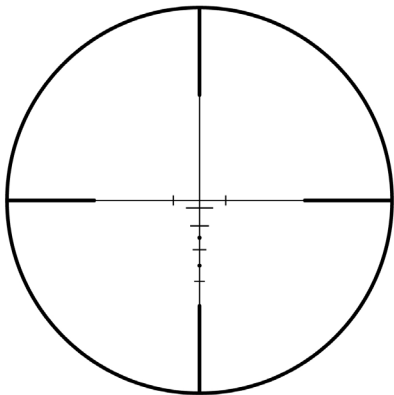

Rangefinder Reticle

The S3932-R-RG Scope is equipped with a Rangefinder reticle designed with set hashmarks for estimating distance and for holdover correction.

1 MOA (Minute of Angle) = approx. 1 inch @ 100 yards away.

The reticle is equipped with an illumination feature that lights up red and green in variable brightness. The illuminated reticle aids visibility in low light environments such as during dusk or against dark targets. It is not usable in very dark environments.

The illuminated reticle is powered by a single CR1632A 3V battery, located within the reticle illumination dial. To change the battery, use a coin to unscrew the cap of the battery hatch and position the battery negative side down.

Warranty Support

Monstrum guarantees this product against manufacturing defects in materials and workmanship for 1 year. For more warranty information please visit: [**MonstrumTactical.com/warranty**](https://MonstrumTactical.com/warranty)

MonstrumTactical.com

All information and images are (c) 2020 Monstrum Tactical Inc